

SYBIL CERDOMUS

— *Stone look* —

SYBIL
CERDOMUS





612SR05R
600×1200mm



AVAILABLE SIZES
600×1200mm
600×600mm

SR01
GREY-WHITE



AVAILABLE SIZES
600×1200mm
600×600mm

SR02
CREAM



AVAILABLE SIZES
600×1200mm
600×600mm

SR05
LIGHT-GREY



AVAILABLE SIZES
600×1200mm
600×600mm

SR09
DARK-GREY



SR01
GREY-WHITE



612SR01R
600×1200mm



60SR01R
600×600mm

612SR01R
600×1200mm





SR02
CREAM



60SR02R
600×600mm



612SR02R
600×1200mm



612SR02R
600×1200mm



SR05
LIGHT-GREY



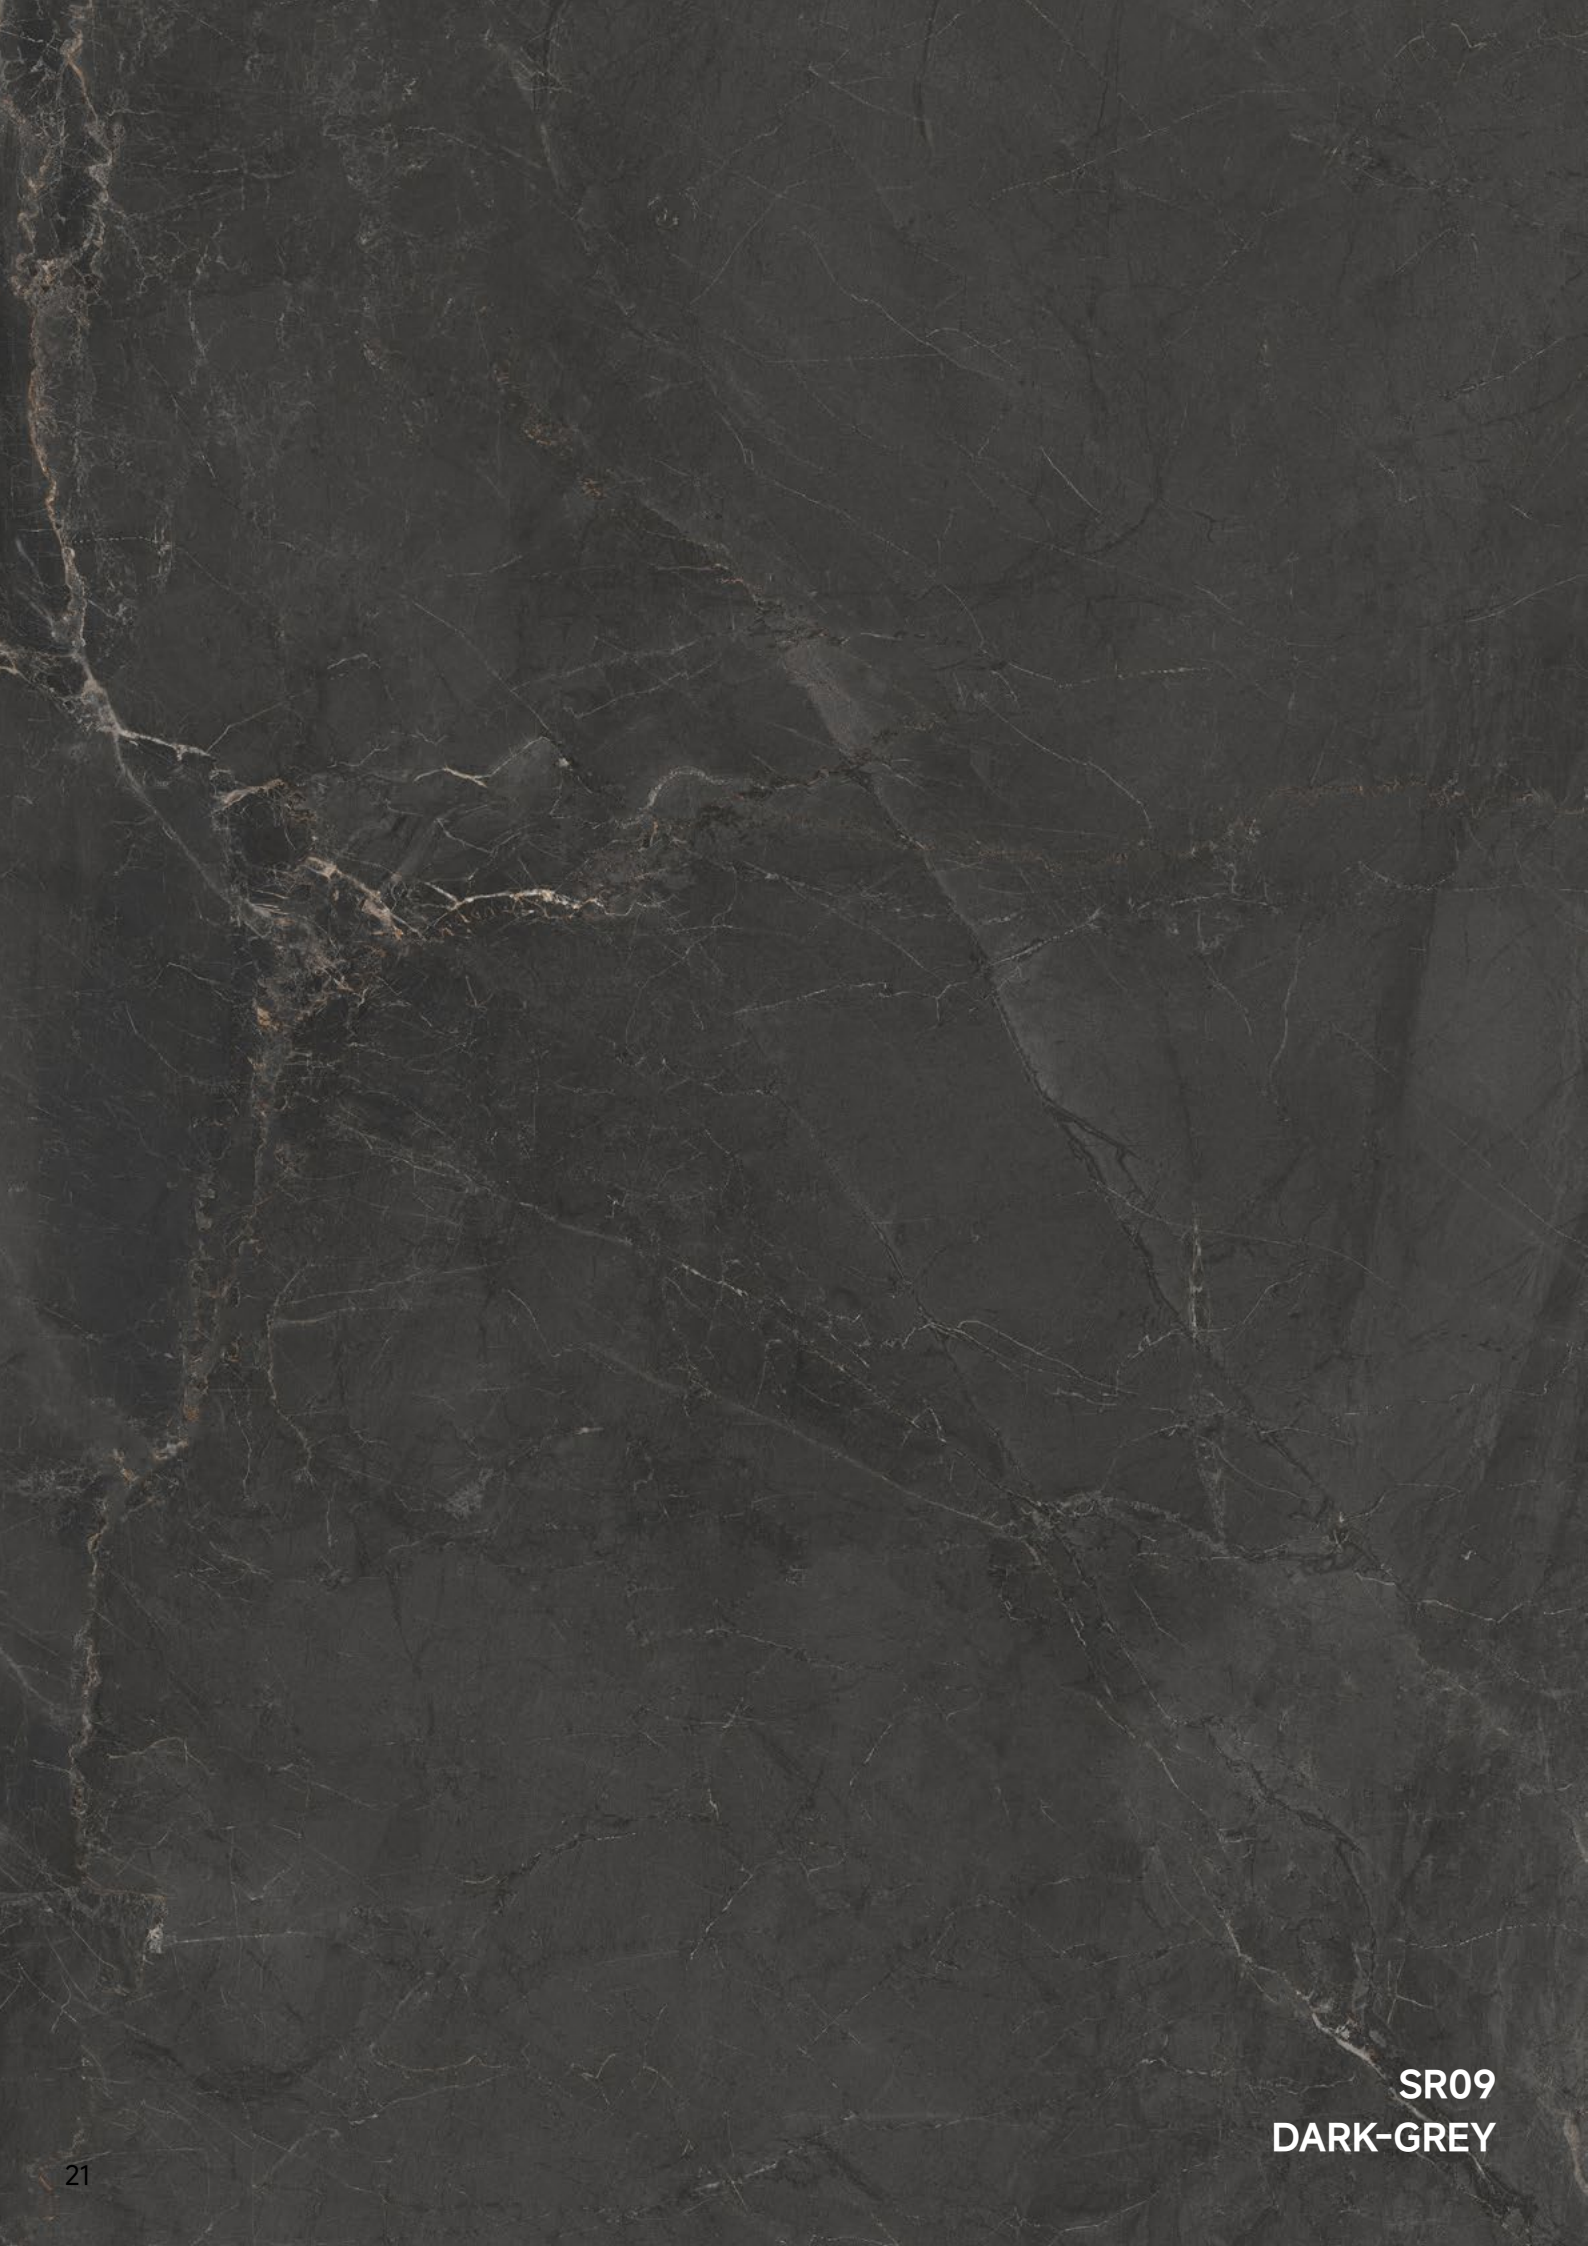
60SR05R
600×600mm



60SR05R
600×600mm



612SR05R
600×1200mm



SR09
DARK-GREY



612SR09R
600×1200mm



60SR09R
600×600mm

DESIGN FACES

Please note: Tile patterns are random and may not represent exactly as shown in the photo.



612SR01R | 600×1200mm 18 FACES




60SR01R | 600×600mm 36 FACES


SURFACE / APPLICATION / PRODUCT SUMMARY

M MATT WALL TILES FLOOR TILES MIN.LAYING GAP 3mm

05 COLOURS 04 SIZES 01 FINISHES



600×1200mm



600×600mm



600×300mm



300×300mm

MATT	P3	✓	✓	✓	✓
------	----	---	---	---	---



SR01
GREY-WHITE



SR02
CREAM



SR05
LIGHT-GREY



SR09
DARK-GREY





TECHNICAL SPECIFICATION

TECHNICAL FEATURES	STANDARD PRESCRIBED VALUES	MANUFACTURER'S VALUES (600×600mm)	MANUFACTURER'S VALUES (600×1200mm)
TECHNICAL SPECIFICATION			
 Length and width	±0.6% max .	-0.03-0.03% max .	-0.03-0.03% max .
 Thickness	±5% max .	9.0-9.5% max .	10.0-10.5% max .
 Orthogonnality	±0.5% max .	-0.06-0.07% max .	-0.06-0.07% max .
 Straightness of sides	±0.5% max .	-0.06-0.07% max .	-0.02-0.03% max .
 Surfaces flatness	±0.5% max .	-0.05-0.07% max .	-0.09-0.11% max .
 V rating	V3	V3	V3
PHYSICAL PROPRETIES			
 Water absorption	≤ 0.5%	≤ 0.5%	≤ 0.5%
 Breaking strength	≥1300N	2265N	4031N
 Bending resistance	≥35N/mm²	38N/mm²	40N/mm²
 Resistance to deep abrasion	≤175mm³	Class 4	Class 4
 Temperature shock resistance	No visible crack	No visible crack	Durable
 Resistance to frost	No visible crack	No visible crack	No visible crack
 Non-slip	P3-P4	P3-P4	P3-P4
 Colour resistance to light	no colour changes	no colour changes	no colour changes
CHEMICAL PROPERTIES			
 Chemical resistance	no visible changes when subjected to chemicals	Durable	Durable
 Resistance to staining	≥ 3	Class 5	Class 5

SURFACE / APPLICATION / PRODUCT SUMMARY

 TEXTURE RATING	 MIN.LAYING GAP 3mm	 RECTIFIED	 WALL TILES
 FLOOR TILES	 COLOURS	 SURFACES	

V RATING

				
V1	V2	✓ V3	V4	V1=Uniform Appearance V2=Slight Variation V3=Moderate Variation V4=Substantial Variation

PACKING DETAILS

SIZE	SURFACE		PCS/CTN	m²/CTN	KG/CTN
	MATT	EXTERNAL			
600x1200mm	✓		2	1.44	32
600x600mm	✓		4	1.44	32